




# HSE Explosion proof solenoid valve · Exd IIC T5 IP65

방폭용 솔레노이드 밸브(3-WAY TYPE) / Certification No. 20-GA2BO-0325X




## ▶형식(MODEL) 방폭코일 3-WAY TYPE(Ø7)

MODEL NO.	VOLTAGE	Hz	WATTAGE	REMARK
H3A-220660-7	AC 220V	60Hz	6±10%	STANDARD
H3A-240650-7	AC 240V	50Hz	6±10%	OPTION
H3A-100660-7	AC 100V	50/60Hz	6±10%	OPTION
H3A-110660-7	AC 110V	60Hz	6±10%	OPTION
H3D-024060-7	AC 24V	-	6±10%	STANDARD
H3D-012060-7	DC 12V	-	6±10%	OPTION
H3D-100600-7	DC 100V	-	6±10%	OPTION

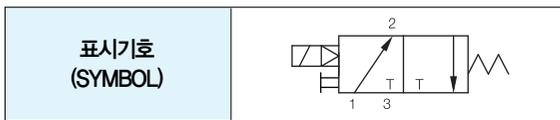

## 외형도(DIMENSIONS)

## CABLE CONNECTION LINE 주문시 선택

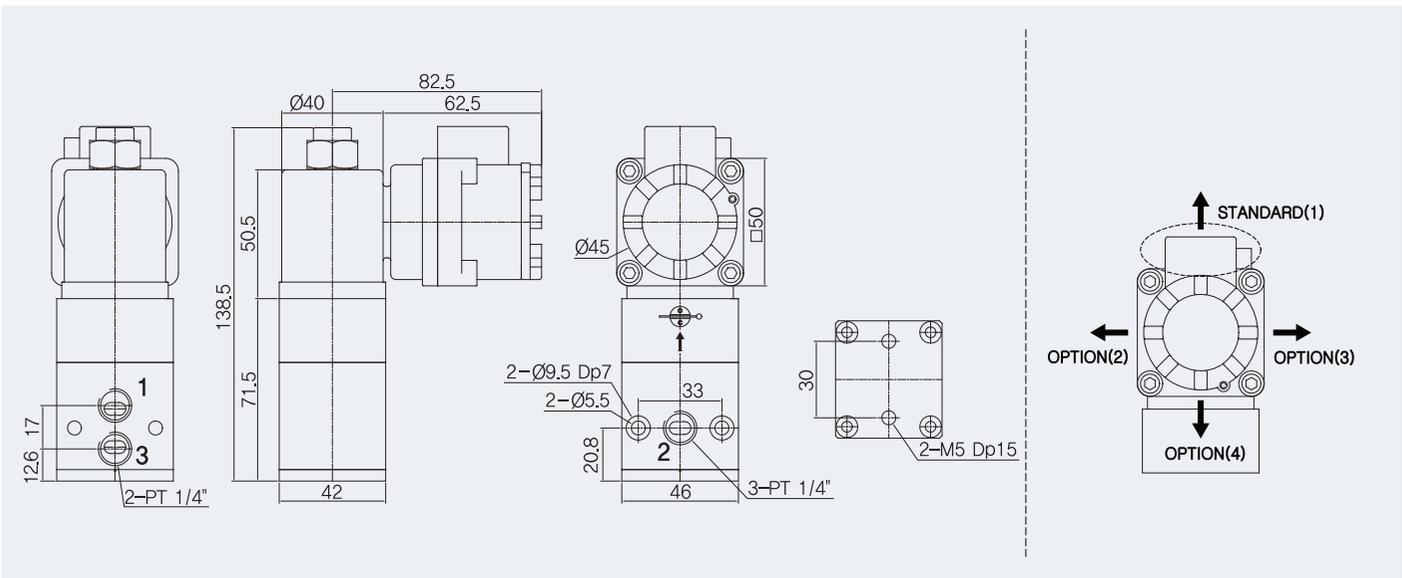

## 사양서(SPECIFICATIONS)

구분 (CLASSIFICATION)	표준 사양 (STANDARD)	구분 (CLASSIFICATION)	표준 사양 (STANDARD)	옵션 사양 (OPTION)
사용유체 (FLUID)	AIR (공기)	사용전압 (RATED VOLTAGE)	AC-220V 60Hz DC-24V	AC-240V 50Hz AC-100V 50/60Hz AC-110V 60Hz DC-100V DC-12V
유체온도범위 (FLUID TEMP.)	0 ~ 60°C			
사용압력범위 (PRESSURE RANGE.)	1.5 ~ 10bar	몸체재질 (BODY MAT'L)	AL	
오리피스 치수 (ORIFICE SIZE)	Ø7mm	씨트재질 (SEAT MAT'L)	NBR	
온도등급 (TEMPERATURE RATING.)	T5 (85°C 초과 100°C 이하)	몸체접속방식 (END CONN.)	PT 1/4"	
코일절연 종별 (INSULATION GRADE)	CLASS H	밸브중량 (WEIGHT)	0.68Kg	

\*기타사양은 HSE에 문의 요망, 도면치수 및 제품사양은 품질향상을 위해 변경될수 있음  
CONSULT WITH HSE ABOUT OTHER OPTION SPECIFICATIONS, PRODUCT SPECIFICATION IS TO SUBJECT TO THE QUALITY ENHANCEMENT.